



DATASHEET APSINX010

Specification v2.29

Signal Generator

9 kHz to 2000 MHz, 4000 MHz and 6100 MHz



CONTENTS

| | |
|-------------------------------------------------------|-----------|
| Definitions | 3 |
| Introduction | 3 |
| Facts & Figures & Specifications | 4 |
| Frequency Parameters / Range..... | 4 |
| Phase Noise..... | 4 |
| Level Performance | 5 |
| Reverse Power Protection and VSWR..... | 6 |
| Spectral Purity..... | 6 |
| Sweeping Capability | 6 |
| Modulation Capabilities | 7 |
| Pulse Modulation | 7 |
| Frequency Modulation..... | 7 |
| Frequency Chirps | 7 |
| Phase Modulation | 8 |
| Amplitude Modulation..... | 8 |
| Avionics Modulation (Option AVIO)..... | 8 |
| Multi-Purpose Output (FUNC OUT) | 9 |
| Trigger (TRIG IN)..... | 9 |
| Connectors..... | 11 |
| Front..... | 11 |
| Rear | 11 |
| Ordering Information | 12 |
| General Characteristics | 13 |
| Document History | 14 |
| Notes | 15 |

DEFINITIONS

• The specifications in the following pages describe the warranted performance of the instrument for $23 \pm 5 \text{ }^\circ\text{C}$ after a 30-minute warm-up period (unless otherwise stated).

Min/Max: Parameter range that is guaranteed by product design, and/or production tested. Warranted performance specifications include guard-bands to account for the expected statistical performance distribution, measurement uncertainties, and changes in performance due to environmental conditions.

Typical: Expected mean values, not warranted performance.

INTRODUCTION

• **APSIN HC models comprises a set of very compact, portable analog signal generator models from 9 kHz up to 6100 MHz. A combination of good signal purity, fast switching speed and wide dynamic range makes these units useful for a variety of applications.**

The APSINX010 is a series of a low-noise and fast-switching analogue signal generator covering a frequency range from 9 kHz up to 2.0, 4.0, and 6.1 GHz, respectively.

The APSINX010 provides full RF signal generator capabilities including OCXO-stabilized low phase-noise signal with micro-Hz frequency resolution, wide and accurately levelled output power range, extensive modulation capabilities, and fast switching.

It is targeted for a wide range of applications where a high-quality analogue signal is mandatory, offering an alternative to expensive high-end RF signal generators, where small size and excellent RF performance at an attractive cost is required.

The very compact and rugged design of the APSINX010 operates at very low DC power consumption (only 12 watts), with minor heat dissipation and not requiring noisy fan. This gives the APSINX010 a great advantage in laboratories or production test facilities.

The low power design allows the use of optional internal battery modules which make it a truly portable instrument, ideally suited for field testing, installation, and maintenance.

Available Options:

- **Option PE3** is an optional power level extension to accurately level below -120 dBm.
- **Option B3** adds an internal rechargeable battery module
- **Option AVIO** adds dedicated avionics modulation like VOR/ILS
- **Option 1URM** modifies form-factor to a 19" rack-mountable 1HU enclosure
- **Option EB6** adds an external power bank adapter cable with voltage converter for 12 to 25 V supply
- **Option FILT** adds harmonic filtering

The APSINX010 support various standard interfaces such as USB (USBTMC), LAN (VXI-11), or GPIB and extensive API with programming examples are available.

FACTS & FIGURES & SPECIFICATIONS


Frequency Parameters / Range

| PARAMETER | MIN | TYPICAL | MAX | NOTE |
|--------------------------------------------|--------|--------------------------|-------------------------------|-----------------------------------------------------------------|
| Frequency range | 9 kHz | | 2.0 GHz 4.0 GHz 6.1 GHz | APSIN2010HC APSIN4010HC APSIN6010HC |
| resolution | | 0.001 Hz | | |
| Phase resolution | | 0.1 deg | | |
| Settling time | | 20 μ s 20 μ s | 100 μ s 200 μ s | <= SN xx-xxx2xxxxx-xxxx >= SN xx-xxx3xxxxx-xxxx |
| Frequency update rate | | 400 μ s | | time from receipt of SCPI command firmware |
| List/Sweep mode | | 400 μ s | | |
| Total jitter | | 68 fs RMS | | 10 Hz to 1 MHz BW |
| Reference frequency input | 8 MHz | | 200 MHz | User programmable |
| Reference input level | -5 dBm | 0 dBm | +13 dBm | |
| Lock Range | | | +/- 1.0 ppm | |
| Reference input impedance | | 50 Ω | | |
| | | | | |
| Internal reference frequency output | | 10 MHz | | |
| Initial accuracy of internal reference | | \pm 40 ppb | | calibrated at 23 \pm 3 $^{\circ}$ C at time of calibration |
| Temperature stability (0 to 50 degC) | | | \pm 100 ppb | |
| Aging 1 st year | | 0.5 ppm | | |
| Aging per day (after 30days operations) | | | 5 ppb | |
| Warm-Up time | | 5 min | | |
| Output of internal reference | | +0dBm 50 Ω | | |

Phase Noise

| PARAMETER | MIN | TYPICAL | MAX | NOTE |
|---------------------------------|-----|-------------|-------------|--------------------------------|
| SSB Phase noise at 1 GHz | | | | |
| at 20 kHz from carrier | | -130 dBc/Hz | -128 dBc/Hz | See measured phase noise plots |

Figure 1: Phase Noise Performance (1, 3 and 6 GHz)

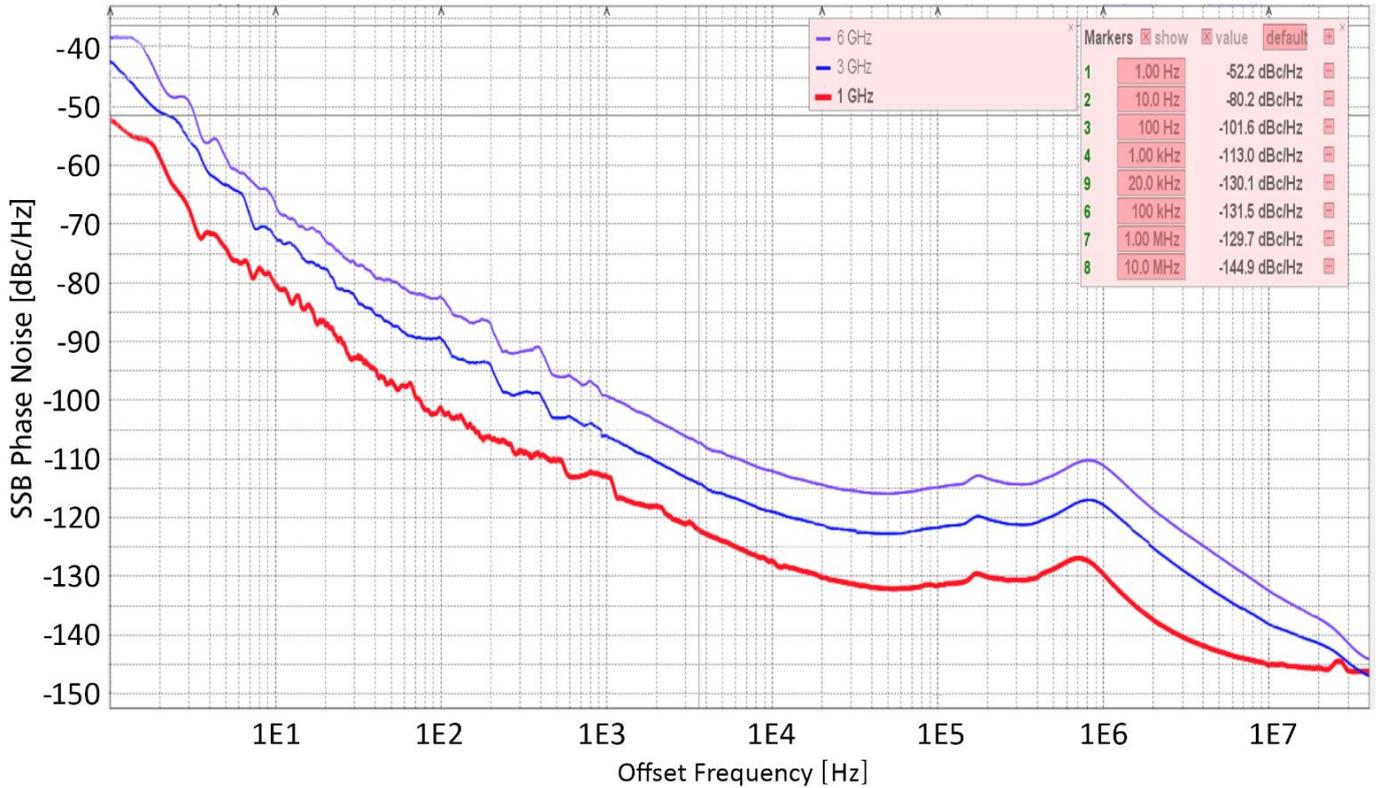

Level Performance

| PARAMETER | MIN | TYPICAL | MAX | NOTE |
|--------------------|----------|---------|----------|-----------------------------------------|
| Power level | | | | |
| Without Option PE3 | -30 dBm | | +18 dBm | See plots on page 8 >50 MHz & <6 GHz |
| With Option PE3 | -120 dBm | | +10 dBm | <= 50 MHz |
| Resolution | | 0.01 dB | | >50 MHz & <6 GHz |
| Level uncertainty | | 0.3 dB | < 0.8 dB | <= 50 MHz |
| | | 0.5 dB | < 1.3 dB | -20 to + 10 dBm |
| | | 0.8 dB | | -80 to -20 dBm |
| | | | | < -80 dBm |

Figure 2: Typical Maximum Output Power (without option PE3)


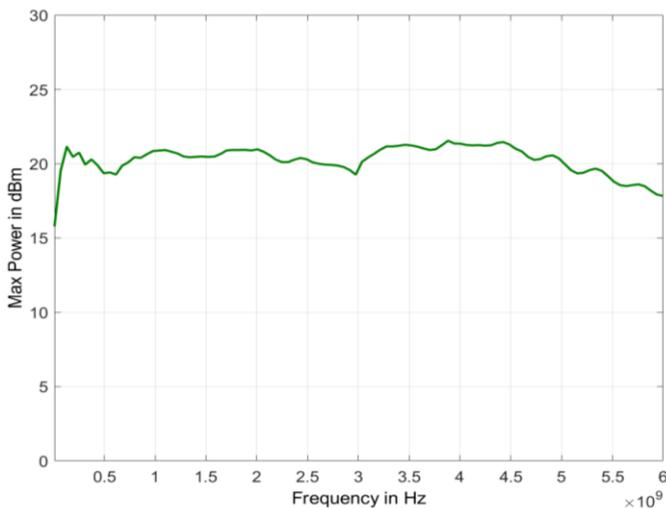


Figure 3: Typical Maximum Output Power (with option PE3)

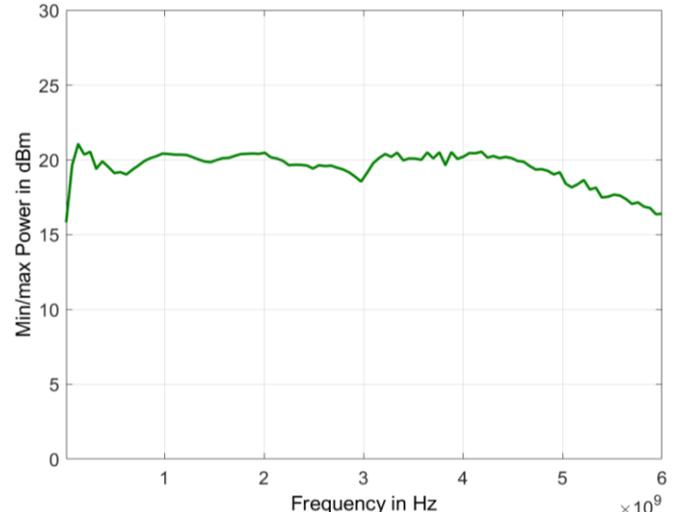

Reverse Power Protection and VSWR

| PARAMETER | MIN | TYPICAL | MAX | NOTE |
|---------------------------------|-----|---------|--------|---------|
| Reverse Power Protection | | | | |
| DC Voltage | | 30 V | | |
| RF power | | | 36 dBm | |
| Output impedance | | | | |
| VSWR | | 50 Ω | 1.8 | < 3 GHz |
| | | 1.5 | 2.0 | > 3 GHz |

Spectral Purity

| PARAMETER | MIN | TYPICAL | MAX | NOTE |
|----------------------------------------------------------------------------|-----|---------|---------|---------------------------------------|
| Spectral purity | | | | |
| Output harmonics > 3.7 GHz Sub-harmonics | | -40 dBc | -30 dBc | $P_{out} = +10$ dBm Option FILT |
| | | -80 dBc | -50 dBc | |
| Non-harmonic spurious < 1 MHz 1 MHz to 5.8 GHz 5.8 GHz to 6.1 GHz | | -70 dBc | -60 dBc | $P_{out} = +10$ dBm |
| | | -65 dBc | -55 dBc | |
| | | -60 dBc | -50 dBc | |
| Residual FM @ 1 GHz | | | 3 Hz | 0.3 kHz to 3 kHz, weighted (ITU-T) |
| | | | 12 Hz | 0.03 kHz to 23 kHz |

Figure 4: Harmonic performance at + 10 dBm


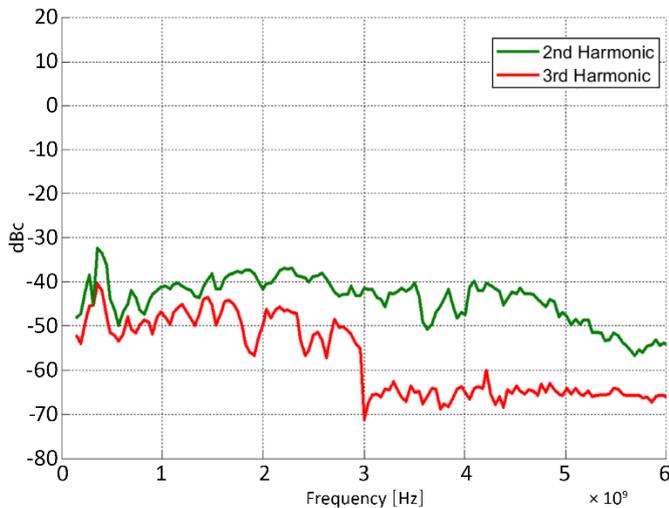


Figure 5: Harmonic performance APSIN6010HC with option FILT

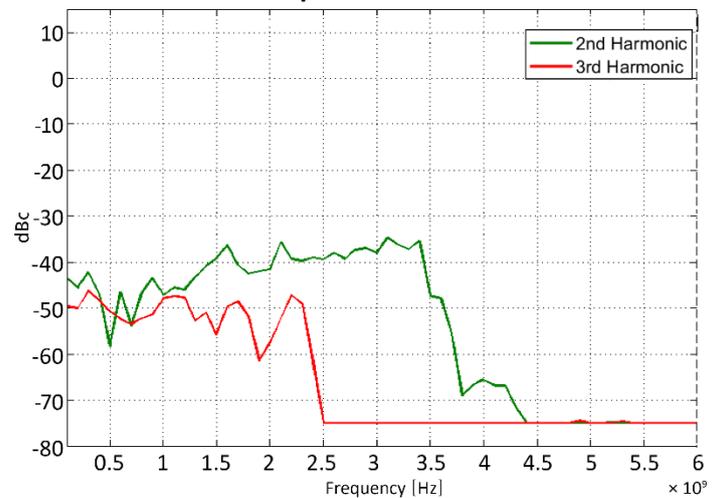

Sweeping Capability

Sweeps can be performed with combined internal or external AM/FM/PM/pulse modulation running. With modulation enabled, the minimum step time increases to 2 ms.

| PARAMETER | MIN | TYPICAL | MAX | NOTE |
|-----------------------------------------------|-----------|---------|---------|------|
| Frequency sweep | | | | |
| Sweep type: linear, logarithmic, random | | | | |
| Step time (t_{step}) | 400 μs | | 19998 s | |
| Dwell time (t_{dwell}) | 50 μs | | 9999 s | |
| Off-time (incl. transient time) (t_{off}) | 0 / 50 μs | | 9999 s | |
| Timing accuracy per point | | 1 μs | | |

Generalized list sweep

allows individual setting of frequency, power, dwell-time, and off-time for each point

| | | | | |
|-----------------------------------------------|----------------|-------------|---------|--|
| List size | 2 | | 20.000 | |
| Step time (t_{step}) | 200 μ s | | 19998 s | |
| Dwell time (t_{dwell}) | 50 μ s | | 9999 s | |
| Off-time (incl. transient time) (t_{off}) | 0 / 50 μ s | | 9999 s | |
| Time resolution | | 0.1 μ s | | |
| Timing accuracy per point | | 1 μ s | | |



Modulation Capabilities

All modulation types (FM, PM, AM, and pulse modulation) may be simultaneously enabled except: FM and phase modulation cannot be combined. For example, AM and FM can run concurrently and will modulate the output RF.

Pulse Modulation

| PARAMETER | MIN | TYPICAL | MAX | NOTE |
|------------------------------|---------------------|---------|--------------|--------------------|
| Pulse modulation | | | | |
| On/off ratio | | 70 dB | | |
| Repetition frequency | DC | | 33 MHz | |
| Pulse width | 30 ns 50 μ s | | 20 s 20 s | ALC hold ALC on |
| Pulse rise/fall time | | 25 ns | | |
| Pulse trainlength (pulses) | 2 | | 4192 | |
| Video crosstalk | | -40 dB | | |
| External input threshold | 0.85 V | 0.9 V | 0.95 V | TTL compatible |
| External input voltage range | -0.5 V | | +5.5 V | TTL compatible |
| External input hysteresis | | 60 mV | | |
| Delay (to RF) | | 20 ns | 40 ns | |

Frequency Modulation

| PARAMETER | MIN | TYPICAL | MAX | NOTE |
|------------------------------------|-------------------------|---------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Frequency modulation | | | | |
| Maximum Frequency deviation (peak) | 0 0 | | 0.05·f N·200 MHz | < 0.25 GHz 0.25 GHz to 0.75 GHz (N=0.125) 0.75 GHz to 1.5 GHz (N=0.25) 1.5 GHz to 3 GHz (N=0.5) > 3 GHz to 6.1 GHz (N=1) |
| Modulation waveforms | Sine, triangle, FSK | | | |
| Modulation rate | 1 Hz/DC | | 800 kHz | -3dB frequency response Max. phase deviation degrades above 20 kHz modulation rate |
| External input sensitivity | < N · 100 MHz for 1 Vpp | | | settable in AC mode discrete values in DC mode |
| Total harmonic distortion | | < 1% | | 1 kHz rate & N · 100 kHz deviation |

Frequency Chirps

(linear ramp, up/down)

| PARAMETER | MIN | TYPICAL | MAX | NOTE |
|-----------|-----|---------|-----|------|
| Bandwidth | | | 10% | |

| | | | | |
|----------------------------|-------|--|-------------|--|
| Dwell time (t_{dwell}) | 10 ns | | 100 μ s | |
| Number of frequencies | | | 20'000 | |

Phase Modulation

| PARAMETER | MIN | TYPICAL | MAX | NOTE |
|----------------------------|----------------------|---------|----------|-----------------------------------|
| Phase modulation | | | | |
| Phase deviation (peak) | 0 | | N·80 rad | |
| Modulation rate | 1 Hz | | 800 kHz | > -3dB frequency response |
| Modulation waveforms | Sine, triangle, FSK | | | |
| External Input sensitivity | N · 40 rad for 1 Vpp | | | |
| Total harmonic distortion | < 1% | | | 1 kHz rate & N · 20 rad deviation |

Amplitude Modulation

| PARAMETER | MIN | TYPICAL | MAX | NOTE |
|-----------------------------|------------------------|---------|------------------|--------------------------------------------------------------------------------|
| Amplitude modulation | | | | |
| Modulation rate | 10 Hz 10 Hz | | 20 kHz 50 kHz | applies for internal and external >= SN xx-xxx5xxxxx-xxxx |
| Modulation depth | 0 % | | 95 % | |
| Modulation waveforms | Sine, triangle, square | | | |
| Accuracy (f<10 MHz) | | 1.3 % | 2 % | f-carrier, modulation depth <80% & 1 kHz modulation rate, power 0 dBm |
| Distortion (f<10 MHz) | | 1.6 % | 3 % | |
| Accuracy (f>10 MHz) | | 0.6 % | 1.4 % | |
| Distortion (f>10 MHz) | | 1 % | 2 % | |
| External input sensitivity | X % per 1 Vpp | | | settable |

Avionics Modulation (Option AVIO)

| PARAMETER | TYPICAL | NOTE |
|--------------------------|-----------------------------------------|------|
| ILS | | |
| Localizer RF frequency | 108 to 112 MHz | |
| Nominal tone frequencies | 90 & 150 Hz | |
| Frequency accuracy | < 0.02 Hz | |
| Centerline (in %) | DDM: 0 \pm 0.1; SDM: 40 \pm 2.0 | |
| Fly left (in %) | DDM: 15.5 \pm 0.5; SDM: 40 \pm 2.0 | |
| Fly right (in %) | DDM: -15.5 \pm 0.5; SDM: 40 \pm 2.0 | |
| Flag (in %) | DDM: 0 \pm 0.1; SDM: 30 \pm 2.0 | |
| Glide Path RF frequency | | |
| Angle of Descent (in %) | 328.6-335.4 MHz | |
| Fly up (in %) | DDM: 0 \pm 0.1; SDM: 80 \pm 3.0 | |
| Fly down (in %) | DDM: 17.5 \pm 0.5; SDM: 80 \pm 3.0 | |
| Flag (in %) | DDM: -17.5 \pm 0.5; SDM: 80 \pm 3.0 | |
| VOR RF frequency | | |
| Subcarrier Frequency | 108 - 118 MHz | |
| FM deviation | 9960 \pm 2.0 Hz | |
| AM tone | 480 Hz | |
| Bearing north | 30 \pm 0.02 Hz | |
| Bearing south | TDM: 30 \pm 2.0 % | |
| | Phase: 180 \pm 0.5 deg | |
| | TDM: 30 \pm 2.0 % | |
| | Phase: 90 \pm 0.5 deg | |

| | |
|--------------|----------------------------------------------------------|
| Bearing east | TDM: $30 \pm 2.0 \%$ Phase: $0 \pm 0.5 \text{ deg}$ |
| Bearing west | TDM: $30 \pm 2.0 \%$ Phase: $270 \pm 0.5 \text{ deg}$ |
| Test 1 | TDM: $20 \pm 1.5 \%$ Phase: $0 \pm 0.5 \text{ deg}$ |
| Test 2 | TDM: $40 \pm 2.0 \%$ Phase: $0 \pm 0.5 \text{ deg}$ |



Multi-Purpose Output (FUNC OUT)

Output is FUNC OUT at rear panel

| PARAMETER | MIN | TYPICAL | MAX | NOTE |
|------------------------------------|-------------------------|---------------------|--------------------------|----------------------------------------|
| MULTIFUNCTION GENERATOR | | | | |
| sine, triangle, square wave | | | | |
| Frequency range | 10 Hz 10 Hz 10 Hz | | 3 MHz 1 MHz 50 kHz | sine triangle square |
| Frequency resolution | | 0.6 Hz | | |
| Output voltage amplitude peak-peak | 10 mV | 5V | 2 V | Sine, triangle Square (CMOS output) |
| Harmonic distortion | | 1 % | | < 100 kHz, 1 Vpp |
| Output impedance | | 50 Ω CMOS | | Sine, triangle squarewave |

VIDEO OUTPUT (of internal pulse modulator)

| | | | | |
|-------------|-------|-------|------|--|
| Output | | CMOS | | |
| Period | 30 ns | | 50 s | |
| Pulse Width | 15 ns | | 50 s | |
| RF delay | | 10 ns | | |

TRIGGER OUT Synchronization mode for multiple sources

| | | | | |
|------------------------------|-------------------------------------------------|--------|--|--|
| Modes | Trigger on sweep start Trigger on each point | | | |
| Trigger waveform pulse width | | 100 ns | | |




Trigger (TRIG IN)

Input is TRIG IN at rear panel


| PARAMETER | MIN | TYPICAL | MAX | NOTE |
|---------------------|--------------------------------------------------------|-----------------|-----|------|
| Trigger Types | Continuous, single, gated, gated direction | | | |
| Trigger Source | RF key, external, bus (GPIB, LAN, USB) | | | |
| Trigger Modes | Continuous free run, trigger and run, reset and run | | | |
| Trigger latency | | tbd | | |
| Trigger uncertainty | | 5 μs | | |

| | | | | |
|--------------------------------------|-----------------|-------|--------|-----------------------------------|
| External Trigger delay | 50 μ s | | 40 s | |
| External Delay Resolution | | 15 ns | | |
| Trigger Modulo | 1 | | 255 | Execute only on Nth trigger event |
| Trigger Polarity | Rising, falling | | | |
| External trigger input threshold | 0.85 V | 0.9 V | 0.95 V | TTL compatible |
| External trigger input voltage range | -0.5 V | | +5.5 V | TTL compatible |
| External trigger input hysteresis | | 60 mV | | |

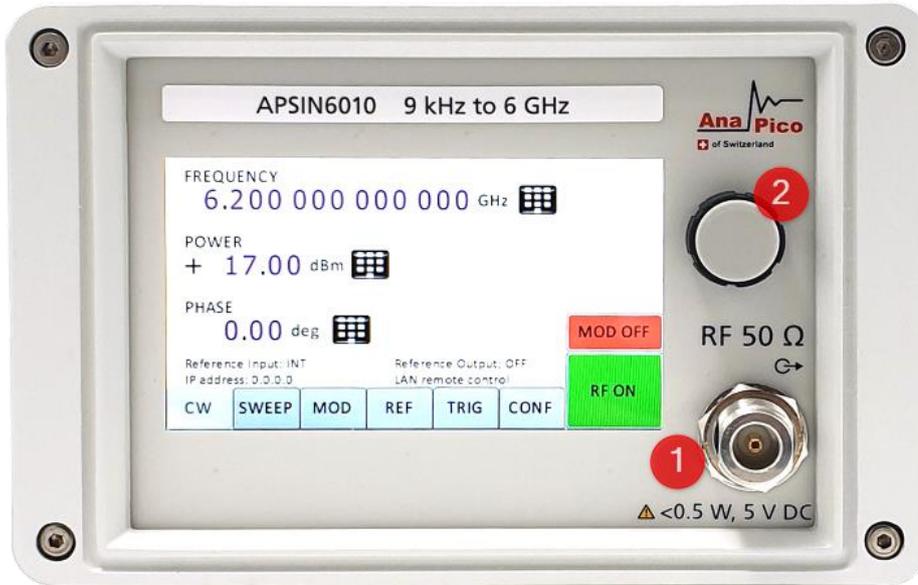

1. RF output N female
2. Rotary knob


Rear

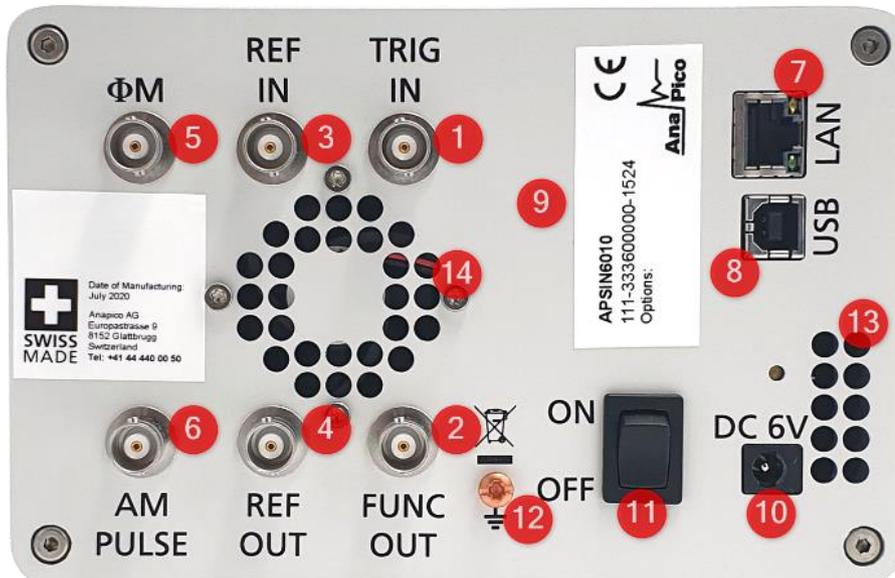

1. Trigger input BNC female
2. Function output BNC female
3. External reference input BNC female
4. Internal reference output BNC female
5. FM/PM modulation input BNC female
6. AM and Pulse modulation BNC female
7. LAN connection RJ-45
8. USB 2.0 device
9. GPIB IEEE-488.2, 1987 with listen and talk (optional)
10. DC Power plug (6V, 6 A)
11. DC power switch
12. Ground Screw
13. Fan Holes The air intake of the fan.
14. Fan Holes The holes by which the air is extruded.

ORDERING INFORMATION



| HOST MODEL | PRODUCT | DESCRIPTION |
|-------------|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| APSINX010HC | APSIN2010HC | 9 kHz – 2000 MHz Signal Generators |
| APSINX010HC | APSIN4010HC | 9 kHz – 4000 MHz Signal Generators |
| APSINX010HC | APSIN6010HC | 9 kHz – 6100 MHz Signal Generators |
| APSINX010HC | Option B3 | Internal rechargeable battery module |
| APSINX010HC | Option PE3 | Mechanical step attenuator |
| APSIN6010HC | Option FILT | Harmonic filtering |
| APSINX010HC | Option FLASH | MicroSD card slot for removable SD memory |
| APSINX010HC | Option GPIB | GPIB interface  |
| APSINX010HC | Option EB6 | External power bank adapter cable with voltage converter for 12 to 25 V supply Required input connector: Inner / outer diameter 2.1 / 5.5 mm  |
| APSINX010HC | Option AVIO | Avionics modulation capability (VOR/ILS) |
| APSINX010HC | Option 1URM | 1U rack-mount module  Dimensions 42 mm H x 426 mm W x 460 mm L [1.7 in H x 16.8 in W x 18.1 in L] |
| APSINX010HC | Option RM | 19" 3HU rack-mount kit |
| APSINX010HC | Option REAR | Move output to the rear panel |
| APSINX010HC | Option OEM | OEM package |
| APSINX010HC | Option DATA | Commercial Calibration Certificate with test data |
| APSINX010HC | Option IEC | IEC 17025 calibration with certificate |
| APSINX010HC | Option Bag | Portable Bag |
| APSINX010HC | Option WE | One-year warranty extension (standard: 2 years) |
| APSINX010HC | Option ReCal | Recalibration with test data (recommended: two years interval) |
| APSINX010HC | Option Retrofit | Applies when options are back-ordered |

GENERAL CHARACTERISTICS

Remote programming interfaces

Ethernet 100BaseT LAN interface
USB 2.0 host & device
GPIB (IEEE-488.2,1987) with listen and talk (optional)
Control language SCPI Version 1999.0

Power requirements: 6 VDC; 20 W maximum

Mains adapter supplied: 100-240 VAC in/ 6 V 6.0 A DC out

Storage temperature range –40 to 70 °C

Operating temperature range 0 to 45 °C

Operating and storage altitude up to 15,000 feet



Safety/EMC complies with applicable Safety and EMC regulations and directives.

Weight ≤ 2.5 kg (6 lbs) net, ≤ 4 kg (8 lb.) shipping

Dimensions:

Excluding connectors: W x L x H = 172 x 250 x 106 mm [6.83 x 9.84 x 4.60 in]

Including connectors: W x L x H = 172 x 273 x 106 mm [6.83 x 10.66 x 4.60 in]

Recommended calibration cycle 24 months

Compatibility languages supporting commonly used commands

Agilent Technologies N5181A MXG, Aeroflex, Rohde & Schwarz SMA and SML models



Document History

| Version | Date | Author | Notes |
|---------|------------|--------|----------------------------------------------------------------|
| V10 | 2010-06-01 | jk | first release |
| V11 | 2010-08-01 | jk | Mechanical information added |
| V12 | 2010-11-01 | jk | Options, |
| V13 | 2010-12-30 | jk | Measurements added |
| V131 | 2011-03-10 | jk | Concurrent sweeps / modulation |
| V140 | 2011-04-28 | jk | Front panel, measurement plots |
| V142 | 2011-05-20 | jk | Reference output 10 MHz, Pmax adjusted |
| V143 | 2011-09-1 | jk | Phase Noise plot |
| V144 | 2012-09-15 | jk | Reference input range adjusted |
| V145 | 2012-09-15 | jk | Added trigger, chirps, pulse trians |
| V146 | 2013-08-26 | db | Modified sweep timing specs |
| V147 | 2013-10-04 | db | Added frequency settling time specs |
| V148 | 2014-01-21 | jk | Corrected dimensions |
| V149 | 2014-02-06 | jk | Maximum power plot added |
| V150 | 2014-06-30 | jk | New phase noise plot |
| V200 | 2014-12-10 | jk | Unified data sheet for APSINX010HC series |
| V210 | 2015-05-10 | jk | Updated sweeping timing parameters |
| V211 | 2015-06-23 | db | Added >= SN xx-xxx5xxxx-xxxx AM bandwidth data |
| V212 | 2016-07-05 | db | Added option PE data |
| V214 | 2016-12-15 | jk | Refine power level accuracy |
| V215 | 2017-05-15 | jk | Option AVIO |
| V216 | 2017-08-15 | jk | VSWR Spec refined |
| V217 | 2019-01-30 | mm | Dimension update |
| V218 | 2019-03-25 | mm | New layout |
| V219 | 2019-07-10 | ee | Minor corrections |
| V220 | 2020-09-15 | db | Clarified Power accuracy at > + 10 dBm |
| V221 | 2020-11-11 | ee | Updated product images |
| V222 | 2021-01-10 | jk | New power plots |
| V223 | 2021-02-25 | db | Pulse and trigger input electrical specifications |
| V224 | 2021-05-10 | ee | Added option EB6 & images for option GPIB and 1URM |
| V225 | 2023-04-05 | ee/mh | Removed Option LH, updated non-harmonic spur data |
| V226 | 2023-05-16 | ap | Added Option FILT |
| V227 | 2023-11-27 | ap | Refined AM modulation |
| V228 | 2023-11-30 | db | Multi-Purpose Output (FUNC OUT) and RF out VSWR specifications |
| V229 | 2024-04-03 | jk | Updated Level uncertainty |

AnaPico of Switzerland

Europa-Strasse 9
8152 Glattbrugg
Switzerland

Phone +41 44 440 00 50
Email sales@anapico.com

www.anapico.com
www.anapico.com/downloads/

